

# Nemo Explorer-4

**Anite**

## 24/7 unattended measurements, benchmarking, and collection of statistics

Nemo Explorer-4 is an ideal solution for performing automated, unattended large-scale measurements. It can be deployed in vehicles and fixed locations. Nemo Explorer-4 houses up to four Android smartphones and supports all 3GPP technologies up to LTE Cat 9.



# Nemo Explorer-4

## Specifications

- Weight: 10.2 kg
- Operating temperature: -15°C to 40°C
- Input voltage: 12V max 8A
- Enclosure material: Aluminium
- Dimensions: 401 x 413 x 108 mm
- GPS input: SMA
- Mobile antenna input/output: SMA




## Network measurements for all 3GPP technologies up to Cat 9

Nemo Explorer-4 is an autonomous field unit for unattended, remote-controlled measurements. It can be installed in fixed locations, such as airports, offices, campuses, and shopping malls as well as in moving vehicles, such as taxis, delivery trucks, and ships. Nemo Explorer-4 enables engineers to focus on the problem spots rather than on collecting information, enabling a completely automated data-processing chain from the field to an open workbook with analysis results.

Nemo Explorer-4 employs up to four handsets equipped with Nemo Handy Autonomous SW and an uplink modem with continuous data connectivity to a remote server. Nemo Explorer-4 is part of the Nemo Autonomous solution consisting of Nemo Explorer-4 field units, Nemo Commander for remote control, and Nemo analytics solutions for reporting and analysis.

There are two different variants of the Nemo Explorer-4 available: one with external antennas for the terminals and one without antennas. In Nemo Explorer-4 without external antennas, the metallic lid has plastic openings to prevent signal attenuation. The Nemo Explorer's aluminium enclosure is splash-proof with a sealed lid and it provides protection for minor physical impacts and dust. The smartphones are held in place by universal terminal holders. The unit is equipped with automatic power on / off for the terminals as well as a Control PC with optional LAN and WiFi connectivity that acts as an HW watchdog, ensuring fully unattended operation. The unit has a USB GPS for location information and mobile antennas ensuring easy and robust installation.

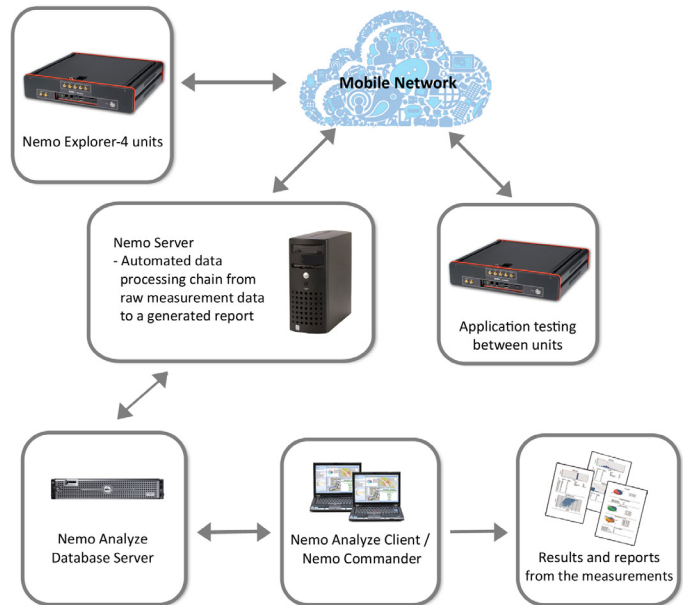

Nemo Explorer-4 supports network measurements for all 3GPP technologies up to LTE Cat 9. Service measurements for data and voice are also supported, including POLQA and PESQ voice quality measurements, FTP, and YouTube. The supported network and service testing capabilities are determined by the Nemo Handy Autonomous terminals used with the Nemo Explorer-4. Terminal development is fast and life cycles are getting shorter all the time. Nemo Handy has a proven track record of rapid adaptation to the latest terminals and technologies. Deployed Nemo Explorer units can be upgraded with the latest Nemo Handy terminals, ensuring flexible and future-proof autonomous testing of the latest technologies.

[www.anite.com/nemo](http://www.anite.com/nemo)

Information given in this publication is subject to change without prior notice. Anite reserves the right to change specifications without prior notice. All trademarks herein are the property of their respective owners.